


Customer	Starnet	Product Specification	Version	Alteration Notice No.	Date
			A/0		



Configuration

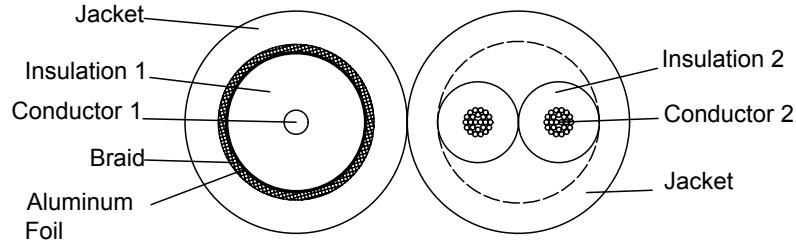

Product Specs:(1/0.81BC*1C+AL+B+PVC+24/0.2BC*2C)+PVC			
Structure			
Conductor		Conductor 1	Conductor 2
	Spec.	1/0.81±0.02mm	24/0.2±0.008mm
	Material	Bare copper	Strand bare copper
Insulation		Insulation1	Insulation 2
	Color	Natural	Black, Red
	Material	Foam PE	PVC
	Avg. Thickness	1.30mm	0.50mm
	I.D.	3.7±0.20mm	2.3±0.15mm
Aluminum Foil	Material	Single-sided aluminum foil, conductive at outer, 100%	N/A
Braid	Material	16/6/(0.12±0.01)mm AM	
Jacket	Material	PVC	
	Color	Black	
	Extruding Mode	Extrusion	Tube
	Avg. Thickness	0.80mm	0.50mm
	O.D.	(6.0+6.0)±0.30mm	
Printed	Content	Starnet RG59+2Cx0.75mm <sup>2</sup> Coaxial Cable xxxM	

Product Name	Starnet RG-59 0.81BC 96AM 2x0.75mm <sup>2</sup> Black					
P/N						
Drawing Date	2016.04.11	Unit	mm	Approved	Checked	Drawed
Page No	1/1	View			Zhiwu Chen	Yong Yang

SUPPLIED BY UNISTAR VICTORIA  
119/45 GILBY RD  
MT WAVERLEY VIC 3149  
TEL: 03 9562 6892